

## 产品规格书

### Specification of Products

产品名称：快速单相桥

产品型号：MFQ60U6NT13-1

浙江世菱半导体有限公司  
ZHEJIANG SHILING SEMICONDUCTOR CO., LTD.

地址：浙江省 丽水市 莲都区

电话：(0578) 3012571 3615078

传真：(0578) 3611180

邮编：323000


E-mail: smrshiling01@163.com

Http://www.smrshiling.com


拟制	审核	核准
金明辉	曹剑龙	宗瑞

SYMBOL	CHARACTERISTIC	TEST CONDITONS	T <sub>j</sub> (°C)	VALUE			UNIT
				M in	Type	M ax	
I <sub>o</sub>	DC output current	Three-phase full wave rectifying circuit, T <sub>C</sub> =100°C	125		60		A
V <sub>RRM</sub>	Repetitive peak reverse voltage	V <sub>RRM</sub> tp=10ms V <sub>RSM</sub> = V <sub>DRM</sub> &V <sub>RRM</sub> +200V	125		600		V
I <sub>RRM</sub>	Repetitive peak current	at V <sub>RRM</sub>	125			5	mA
I <sub>FSM</sub>	Surge forward current	10ms half sine wave	125			1.04	KA
I <sup>2</sup> t	I <sup>2</sup> T for fusing coordination	V <sub>R</sub> =0.6V <sub>RRM</sub>					3.36
V <sub>FO</sub>	Threshold voltage		125			0.80	V
r <sub>F</sub>	Forward slop resistance						4.0
V <sub>FM</sub>	Peak forward voltage	I <sub>FM</sub> =60A	25			1.4	V
t <sub>rr</sub>	Reverse Recove ry Tei m	I <sub>F</sub> =1A, V <sub>R</sub> =30V, di <sub>F</sub> /dt=-200A/μs				50	ns
R <sub>th(j-c)</sub>	Thermal resistance Junction to heatsink	Single side cooled				0.150	°C /W
V <sub>iso</sub>	Isolation voltage	50Hz,R.M.S,t=1min,I <sub>iso</sub> :1mA(max)		3000			V
F <sub>m</sub>	Terminal connection torque(M5)				5.0		N.m
	Mounting torque(M6)				5.0		N.m
T <sub>stg</sub>	Stored temperature			-40		125	°C
W <sub>t</sub>	Weight				175		g
Outline							


### OUTLINE DRAWING & CIRCUIT DIAGRAM

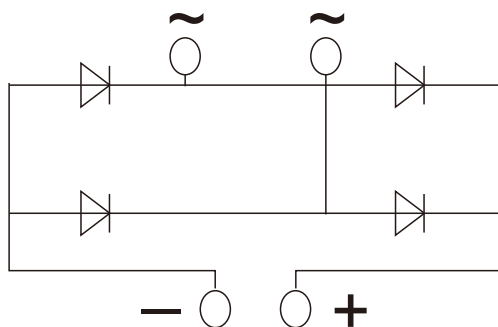


## Rating and Characteristic

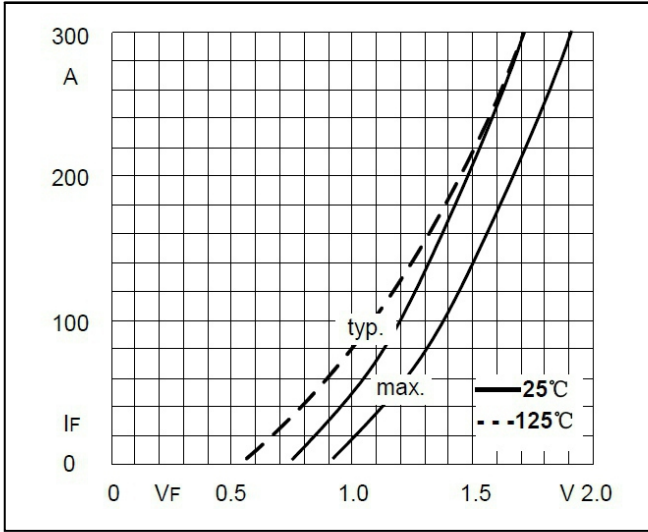


**Fig1. Forward Characteristics**

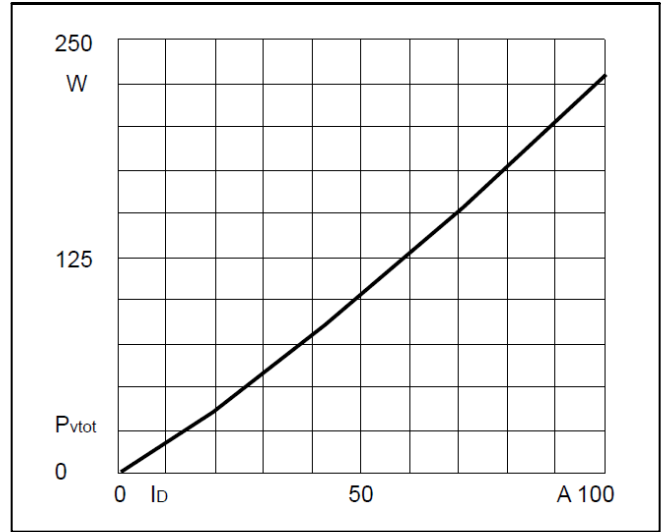


**Fig2. Power dissipation**

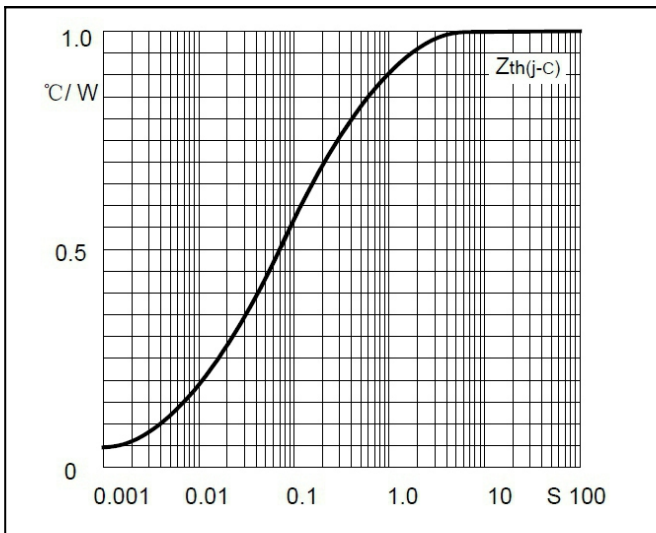

**Fig3. Transient thermal impedance**

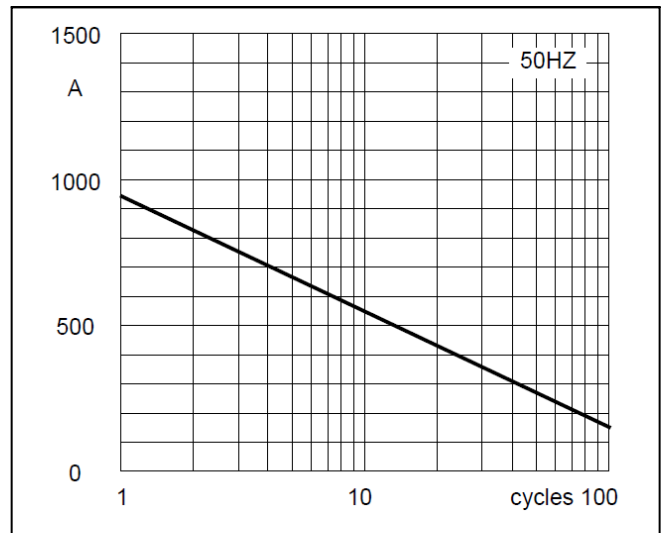

**Fig4. Max Non-Repetitive Forward Surge Current**

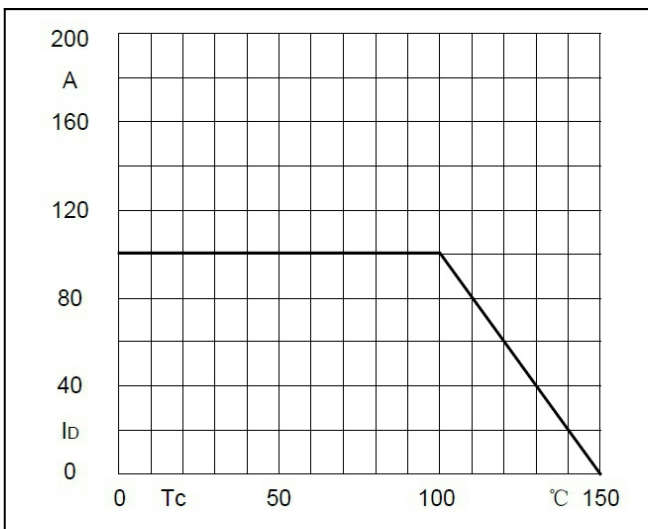

**Fig5. Forward Current Derating Curve**

## Package Outline Information

