

产品规格书

Specifcation of products

产品名称:快恢复二极管

产品型号:MFK200U6K2

浙江世菱半导体有限公司
ZHEJIANG SHILING SEMICONDUCTOR CO.,LTD.

地址:浙江省 丽水市 莲都区

电话:(0578) 3615066

邮编: 323000

E-mail:smrshiling12@163.com

Http://www.smrshiling.com


拟制	审核	核准
蓝少波	陈一凡	曹剑龙

PRODUCT FEATURES

- Ultrafast Reverse Recovery Time
- Soft Reverse Recovery Characteristics
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Inductance Package

APPLICATIONS

- Inversion Welder
- Uninterruptible Power Supply (UPS)
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Converter & Chopper
- Power Factor Correction (PFC) Circuit



ABSOLUTE MAXIMUM RATINGS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Values	Unit
V_R	Maximum D.C. Reverse Voltage		600	V
V_{RRM}	Maximum Repetitive Reverse Voltage		600	V
$I_{F(AV)}$	Average Forward Current	$T_C=100^{\circ}\text{C}$, Per Diode	100	A
		$T_C=100^{\circ}\text{C}$, Per Moudle	200	A
$I_{F(RMS)}$	RMS Forward Current	$T_C=100^{\circ}\text{C}$, Per Diode	145	A
I_{FSM}	Non-Repetitive Surge Forward Current	1/2 Cycle , 50Hz, Sine	1200	A
		1/2 Cycle , 60Hz, Sine	1320	A
I^2t	I^2t (For Fusing)	$T_J=45^{\circ}\text{C}$, $t=10\text{ms}$, 50Hz, Sine	7300	A^2s
		$T_J=45^{\circ}\text{C}$, $t=8.3\text{ms}$, 60Hz, Sine	7400	A^2s
P_D	Power Dissipation		625	W
T_J	Junction Temperature		-40 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range		-40 to +125	$^{\circ}\text{C}$
Torque	Module-to-Sink	Recommended (M6)	3~6	N.m
Torque	Module Terminal	Recommended (M6)	3~5	N.m
R_{thJC}	Thermal Resistance	Junction-to-Case, Per Diode	0.2	$^{\circ}\text{C}/\text{W}$
Weight				g

ELECTRICAL CHARACTERISTICS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{RM}	Reverse Leakage Current	$V_R=600\text{V}$	--	--	0.5	mA
		$V_R=600\text{V}, T_J=125^{\circ}\text{C}$	--	--	5	mA
V_F	Forward Voltage	$I_F=100\text{A}$	--	1.2	1.5	V
		$I_F=100\text{A}, T_J=125^{\circ}\text{C}$	--	1.00	--	V
t_r	Reverse Recovery Time t_r	$I_F=1\text{A}, V_R=30\text{V}, di_F/dt=-200\text{A}/\mu\text{s}$	--	50	--	ns
t_r	Reverse Recovery Time t_r	$V_R=300\text{V}, I_F=100\text{A}$ $di_F/dt=-200\text{A}/\mu\text{s}, T_J=25^{\circ}\text{C}$	--	105	--	ns
I_{RRM}	Max. Reverse Recovery Current		--	10	--	A
t_r	Reverse Recovery Time t_r	$V_R=300\text{V}, I_F=100\text{A}$ $di_F/dt=-200\text{A}/\mu\text{s}, T_J=125^{\circ}\text{C}$	--	200	--	ns
I_{RRM}	Max. Reverse Recovery Current		--	18	--	A

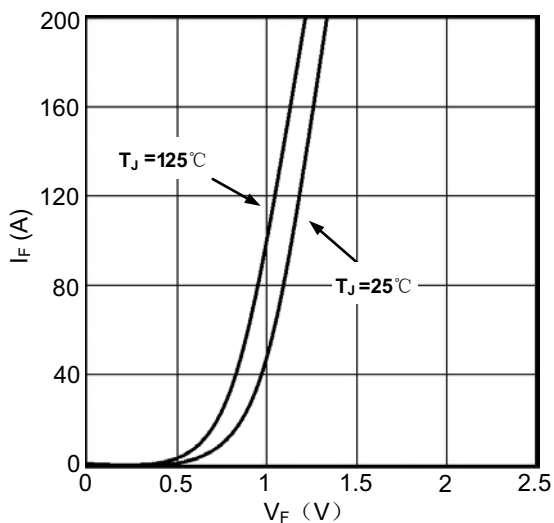


Figure1. Forward Voltage Drop vs Forward Current

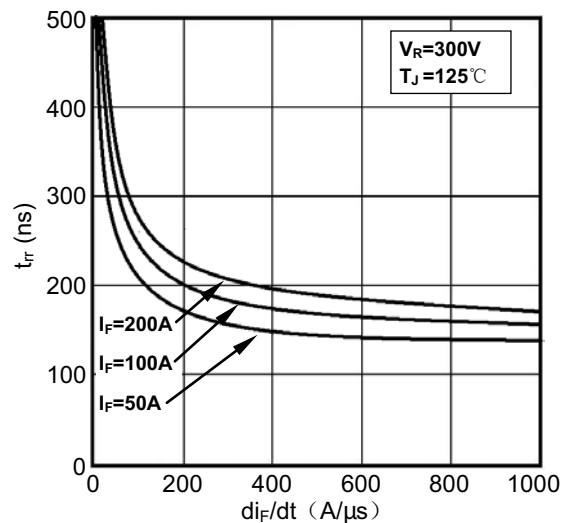


Figure2. Reverse Recovery Time vs di_F/dt

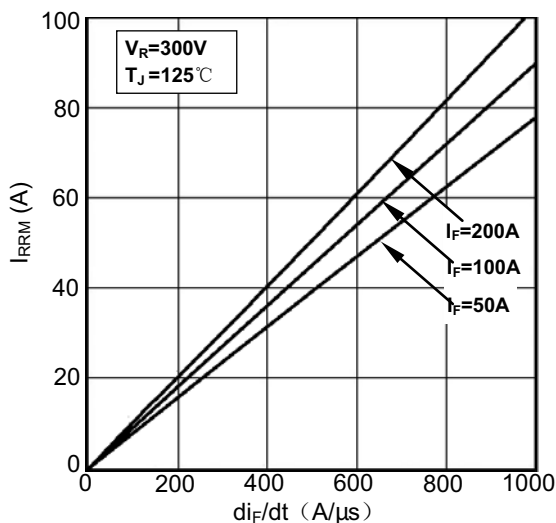


Figure3. Reverse Recovery Current vs di_F/dt

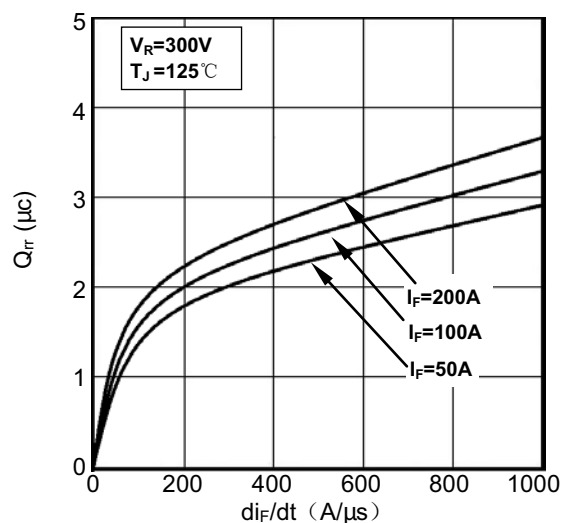


Figure4. Reverse Recovery Charge vs di_F/dt

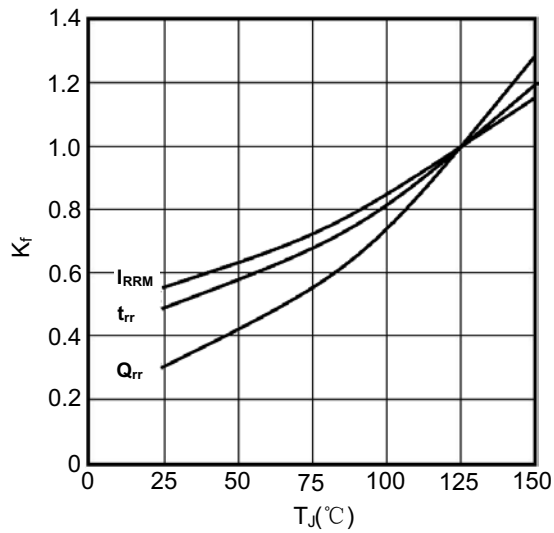


Figure5. Dynamic Parameters vs Junction Temperature


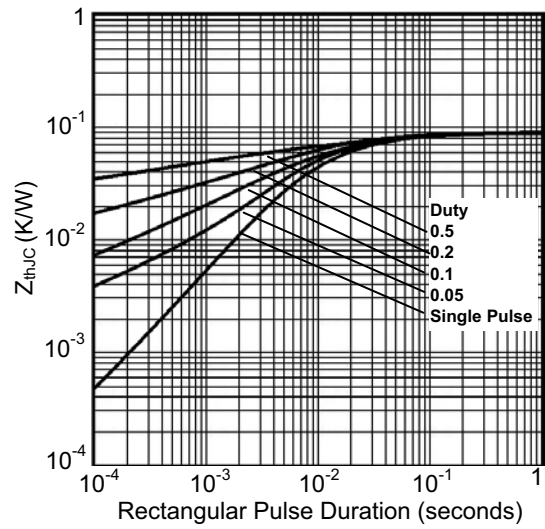


Figure6. Transient Thermal Impedance

Package Outlines

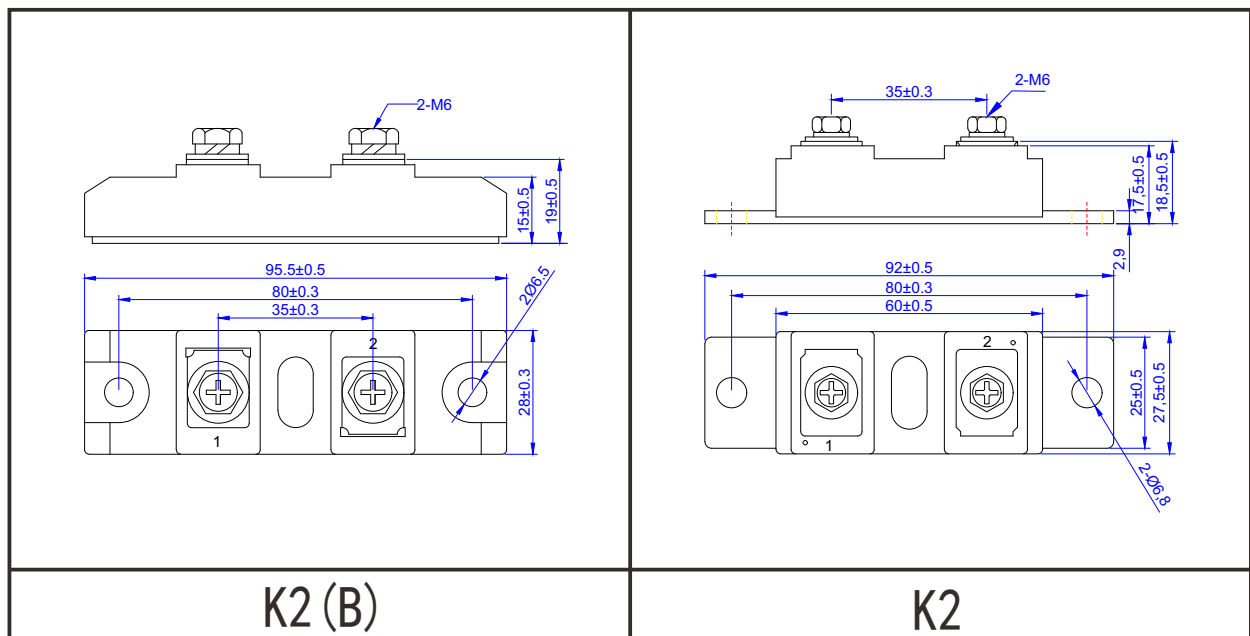

Dimensions (mm)