

## 产品规格书

### Specifcation of products

产品名称: 快恢复二极管

产品型号: MURP400200CI

浙江世菱半导体有限公司  
ZHEJIANG SHILING SEMICONDUCTOR CO., LTD.

地址: 浙江省 丽水市 莲都区

电话: (0578) 3615066

邮编: 323000

E-mail: smrshiling12@163.com

Http://www.smrshiling.com

|     |     |     |
|-----|-----|-----|
| 拟制  | 审核  | 核准  |
| 蓝少波 | 陈一凡 | 曹剑龙 |

## UltraFast Soft Recovery Diode Module

### Description

Ultra-FRD module devices are optimized to reduce losses and EMI/RFI in high frequency power conditioning electrical systems. These diode modules are ideally suited for power converters, motor drives and other applications where switching losses are significant portion of the total losses.

### Features


- ☞ Repetitive Reverse Voltage :  $V_{RRM}=200V$
- ☞ Low Forward Voltage Drop :  $V_F$  (typ.) = 1.0V
- ☞ Average Forward Current :  $I_F(AV.) = 400A$  @  $T_c=100^\circ C$
- ☞ Ultra-Fast Reverse Recovery Time :  $t_{rr}(typ.) = 95\text{ ns}$
- ☞ Extensive Characterization of Recovery Parameters
- ☞ Reduced EMI and RFI
- ☞ Non Isolation Type Package

### Applications

Motor Drives, Free wheel use, High Power Converters, Welders, Various Switching and Telecommunication Power Supply.

### Equivalent Circuit and Package

Equivalent Circuit



Package



Please see the package Out line information

### Absolute Maximum Ratings @ $T_j=25^\circ C$ (Per Leg)


| Symbol      | Parameter                                                         | Conditions                                                        | Ratings           | Unit       |
|-------------|-------------------------------------------------------------------|-------------------------------------------------------------------|-------------------|------------|
| $V_{RRM}$   | Repetitive Peak Reverse Voltage                                   |                                                                   | 200               | V          |
| $V_{R(DC)}$ | Reverse DC Voltage                                                |                                                                   | 160               | V          |
| $I_{F(AV)}$ | Average Forward Current @ $T_c=25^\circ C$<br>@ $T_c=100^\circ C$ | Resistive Load                                                    | 800<br>400        | A<br>A     |
| $I_{FSM}$   | Surge (non-repetitive) Forward Current                            | One Half Cycle at 60Hz, Peak Value                                | 8000              | A          |
| $I^2_t$     | $I^2t$ for Fusing                                                 | Value for One Cycle Current, $t_W=8.3ms$ , $T_j=25^\circ C$ Start | $119 \times 10^3$ | $A^2 s$    |
| $T_j$       | Junction Temperature                                              |                                                                   | $-40 \sim 125$    | $^\circ C$ |
| $T_{stg}$   | Storage Temperature                                               |                                                                   | $-40 \sim 125$    | $^\circ C$ |
| $P_d$       | Maximum Power Dissipation                                         |                                                                   | 1160              | W          |
| —           | Mounting Torque                                                   |                                                                   | 4.0               | N.m        |
| —           | Terminal Torque                                                   |                                                                   | 3.0               | N.m        |

## Thermal Characteristics


| Symbol        | Parameter          | Conditions       | Values |      |      | Unit |
|---------------|--------------------|------------------|--------|------|------|------|
|               |                    |                  | Min.   | Typ. | Max. |      |
| $R_{th(j-c)}$ | Thermal Resistance | Junction to Case | -      | -    | 0.10 | °C/W |

## Electrical Characteristics @ $T_j = 25^{\circ}\text{C}$ (unless otherwise specified)


| Symbol    | Parameter                       | Conditions                                                                                                          | Values |      |      | Unit |
|-----------|---------------------------------|---------------------------------------------------------------------------------------------------------------------|--------|------|------|------|
|           |                                 |                                                                                                                     | Min.   | Typ. | Max. |      |
| $V_R$     | Cathode Anode Breakdown Voltage | $I_R = 100\mu\text{A}$                                                                                              | 200    | -    | -    | V    |
| $V_{FM}$  | Maximum Forward Voltage         | $I_{FM} = 400\text{A}$ , $T_C = 25^{\circ}\text{C}$                                                                 | -      | 1.0  | 1.1  | V    |
|           |                                 | $I_{FM} = 400\text{A}$ , $T_C = 100^{\circ}\text{C}$                                                                | -      | 0.7  | 0.8  | V    |
| $I_{RRM}$ | Repetitive Peak Reverse Current | $T_C = 100^{\circ}\text{C}$ , $V_{RRM}$ applied                                                                     | -      | -    | 3.0  | mA   |
| $t_{rr}$  | Reverse Recovery Time           | $I_{FM} = 300\text{A}$ ,<br>$V_R = 150\text{V}$<br>$di/dt = -100\text{A}/\mu\text{s}$<br>$T_C = 25^{\circ}\text{C}$ | -      | 65   | 70   | ns   |
|           |                                 | $T_C = 100^{\circ}\text{C}$                                                                                         | -      | 100  | -    | ns   |

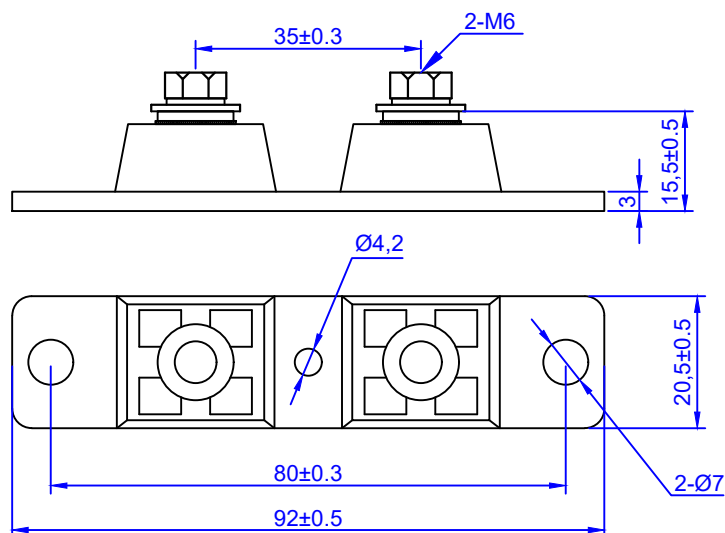


### Performance Curves

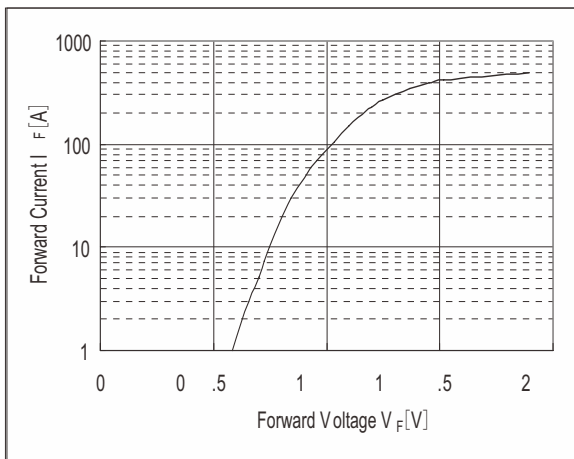


**Fig. 1 : Typical Forward Voltage Drop vs. Instantaneous Forward Current**

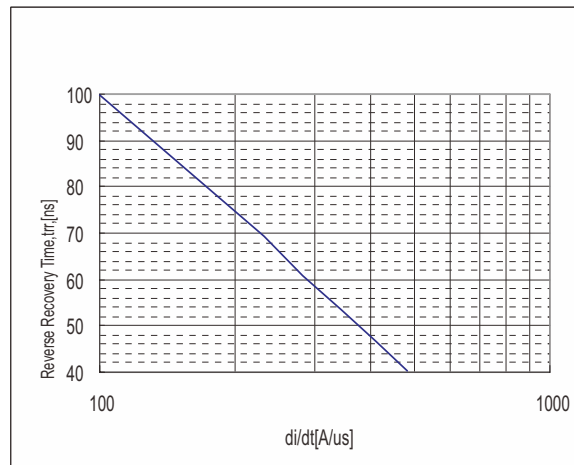

**Fig. 2 : Typical Reverse Recovery Time vs.  $-di/dt$**

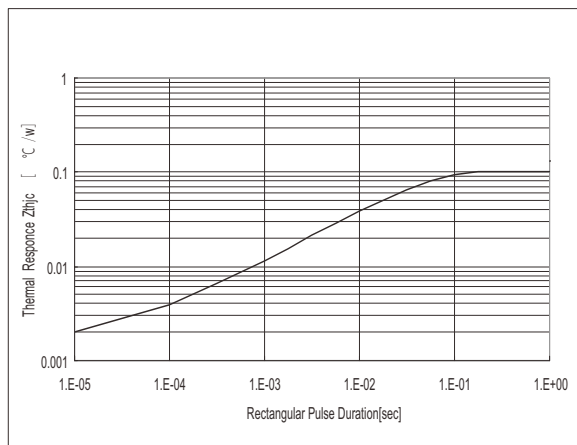

**Fig. 3 : Transient Thermal Impedance ( $Z_{thjc}$ ) Characteristics**

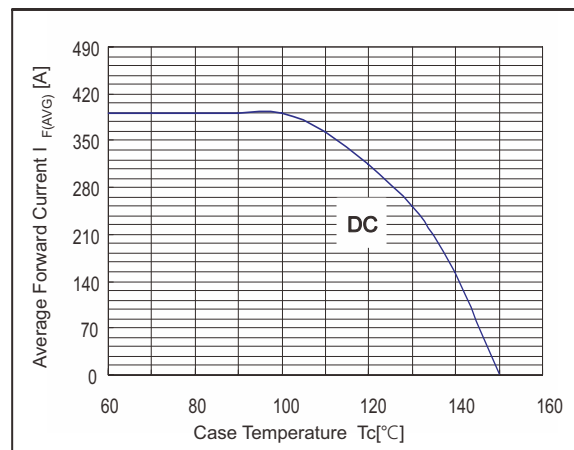

**Fig. 4 : Forward Current Derating Curve**